



UNILED™
REVISION: A
EFFECTIVE: 10/2017


UNILED™

LED LINEAR FIXTURES FOR ELEVATORS

DOWNLIGHT



UNILED™

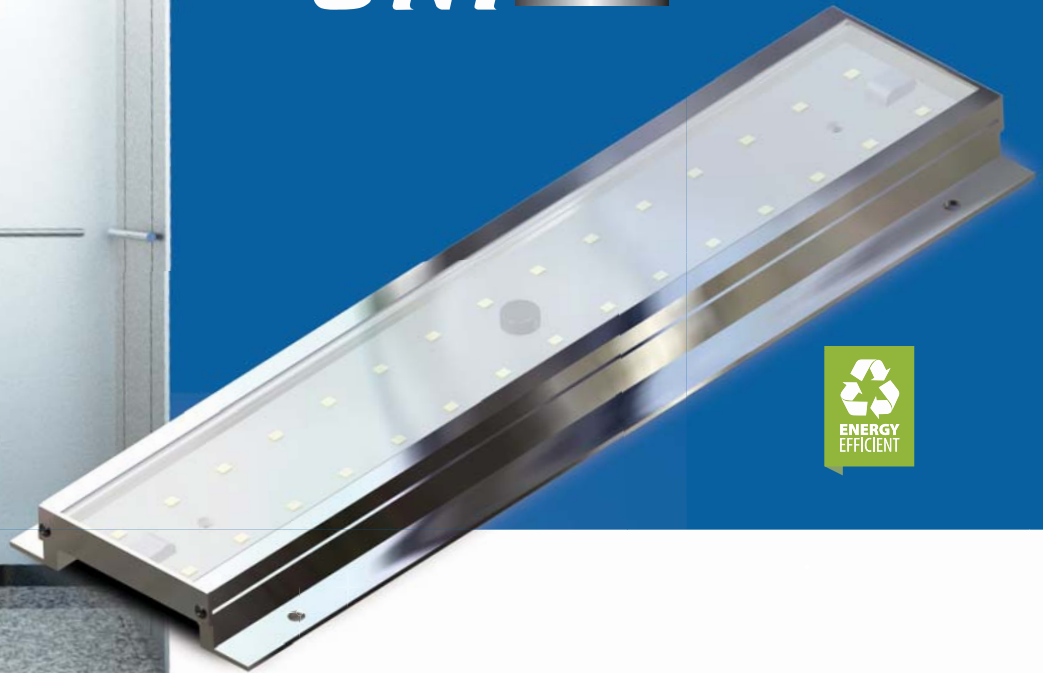

UNILED by Man-D-Tec®

SURFACE-MOUNT CONTEMPORARY LED LINEAR LIGHTING FOR ELEVATORS.

Neutral white linear LED lighting delivering 839 lumens per foot. Designed to be mounted as surface-mount, and can be used as a direct source of light into the cab or behind t-frame diffusers (instead of fluorescent lights). Available in 2', 3', and 4' lengths, with quick-connect installation, aluminum construction, and a wide beam angle for superior lighting on cab walls.

Product Specifications on the back of page.



1.800.944.6263

WWW.MANDTEC.COM

UNILED™

REVISION: A
EFFECTIVE: 10/2017

UNILED™
SPECIFICATIONS

Fixture
(UNILED™)

MATERIAL	Aluminum Extrusion	
DIMENSIONS	0.75"	Overall Thickness
	2.50"	Width (3.5" overall width including flanges)
	Varies (see sizes)	Overall Length (12.5" minimum length)
FINISH	Brushed Aluminum	
LED COLOR	Neutral White (Approx 4,000k)	
OUTPUT	1678-3356 Lumens @ 4,000k (2' - 4' Fixture)	
LED	Wattage	8 Watts per foot
	Emitting Angle	Approx 110 degree wide angle helps prevent dark spots



Mounting
Choices

MOUNTING **Surface Mount (Pre-drilled mounting holes)**

Power
Supply

MATERIAL **.060 Aluminum**

VOLTAGE **Input:** 115 VAC (220VAC Also Available)
Output: 24 VDC

Power supply INCLUDED with fixture

Wiring

SECONDARY (OUTPUT) **Pre-harnessed with quick connect(s) at power supply and at fixture**

Emergency
(Optional)

ELS-IR™
Powers up to 4 feet of UNILED during power failure to meet ANSI 17.1 & ASME 17.3-2008 Elevator Code.

EXCEEDS A17.3 4-HOUR RUNTIME CODE REQUIREMENT FOR EMERGENCY LIGHTING.



MAN-D-TEC, INC.
8175 E. PARADISE LANE
SCOTTSDALE, AZ 85260

P. 480.998.0325
F. 480.998.0318

1.800.944.6263
WWW.MANDTEC.COM