




ELS400
REVISION: F
EFFECTIVE: 5/2015

ELS[®]-400[™]

ELEVATOR EMERGENCY LIGHTING SYSTEM

EMERGENCY LIGHTING

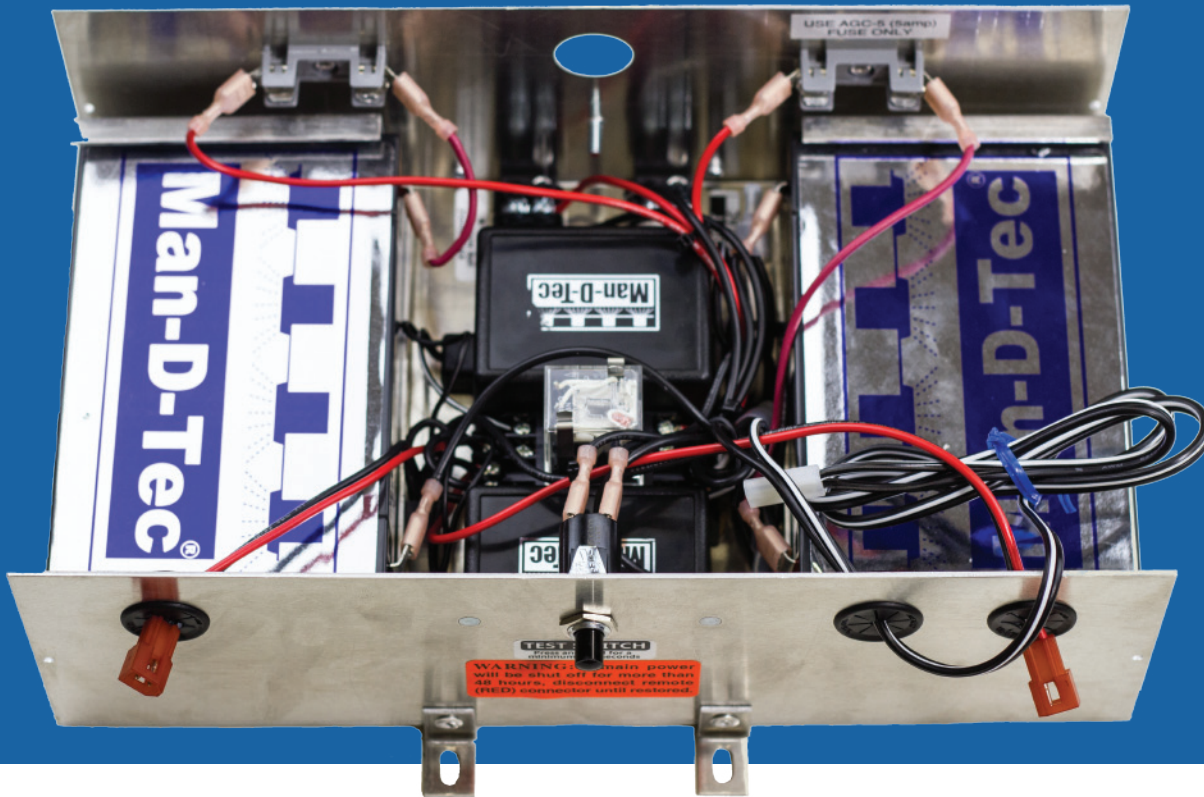

ELS-400 by Man-D-Tec[®]

UNIQUE, EMERGENCY LIGHTING SYSTEM, DESIGNED SPECIFICALLY FOR ELEVATOR APPLICATIONS.

The ELS-400 is perfect for codes or specifications requiring the same lamp to provide normal and emergency lighting. This 6 volt unit powers two (2) Man-D-Tec low voltage incandescent Minilite[®] (M-DL[™]) or two (2) halogen (H-DL[™]) fixtures during a normal power outage.

Contains the following features:

- 1) Pre-harnessed to plug directly into our halogen (H-DL[™]) and incandescent Minilite[®] (M-DL[™]) systems.
- 2) Simple plug and play installation.
- 3) Exceeds A17.3 4-hour runtime code requirement for emergency lighting.

Product Specifications on the back of page.

FOR OPTIONS SEE
ACCESSORIES



44BD
ELEVATOR CONTROL,
ELEVATOR ACCESSORY
E329545

1.800.944.6263

WWW.MANDTEC.COM

ELS400

REVISION: F

EFFECTIVE: 5/2015

ELS[®]-400[™]

SPECIFICATIONS

For Use With:

MAN-D-TEC HALOGEN (H-DL[™]) 20 watt Man-D-Tec halogen systems
MAN-D-TEC MINILITE[®] (M-DL[™]) 20 watt Man-D-Tec incandescent systems



H-DL Halogen



M-DL Minilite

(fixtures shown for example and not included)

Power Supply (ELS-400)



448D
ELEVATOR CONTROL,
ELEVATOR ACCESSORY
E329545

BOX MATERIAL .060 Aluminum

DIMENSIONS 12" Overall Length
7" Overall Width
4" Overall Height

CHARGER (2) Automatic Maintains peak battery condition

BATTERY (2) High Capacity, Sealed, 6 volt, Maintenance-Free, Long Life (Part # B-3/4, incl.)
Exceeds A17.3 4-hour runtime code requirement for emergency lighting

INPUT Line Voltage (115 VAC)

OUTPUT Included Batteries (6 VDC)

TEST SWITCH Verifies system function

INCLUDED ELS-400 power supply: batteries, chargers, pre-wired for plug and play

Features

Pre-harnessed to plug directly into the downlighting system

Meets architectural requirements calling for the same lamp to provide normal and emergency lighting.

Powers (2) two H-DL Halogen or (2) two M-DL Minilite 20 watt lighting fixtures

Alarm Bell (Optional)

ESA-1[™] (6 VDC)

The ELS-400 Emergency Lighting System is provided with alarm terminals. The optional ESA-1 is a loud gong style bell, providing up to 95dB(A). Please specify this option when ordering.



MAN-D-TEC, INC.

8175 E. PARADISE LANE
SCOTTSDALE, AZ 85260

P. 480.998.0325
F. 480.998.0318

1.800.944.6263

WWW.MANDTEC.COM